



[www.sdgspa.it](http://www.sdgspa.it)

**Customer:** Standard

**Coode:** /

**Product.:** Round box **140gr** - Lid + Bottom

**Board composition:** Recycled cartonboard white


g/mq 400 (+/-5%). Cardboard for ring Recycled  
cartonboard white g/mq 470 (+/-5%)

**Printing type:** OFFSET

**Product weight:** 13,3 g

## IMAGE AND TECHNICAL DRAW /

The sizess are in mm

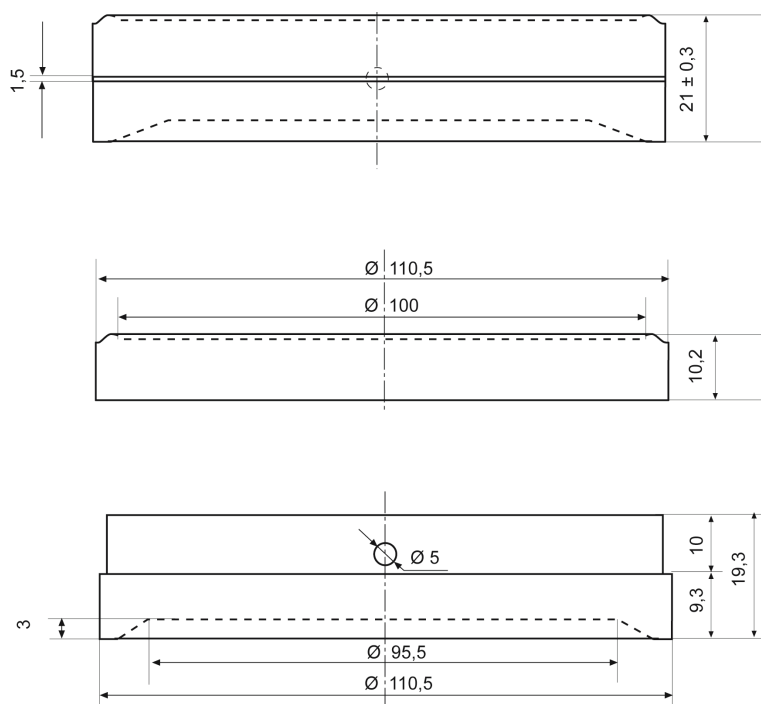

## PACKAGING PRODUCT /

**Box Type:** Waved carton box Havana brown

**External Box size (W x L x H):** 577 x 577 x 455h mm

**Gross weight:** 8,1 kg

**Net weight:** 7,5 kg

**Unit / Pack:** 28

**Packs / Box:** 20

**Unit / Box:** 560

**Packs Type:** /

**Label per pack:** no

**Label per pack:** si

**Box / Pallet:** 12

**Box per layer:** 4 **Layers per pallet:** 3


**Size pallet:** 100x120 cm a perdere

**Pallet hight:** 1,9 m circa (compreso pallet)

## TECHNICAL SPECIFICATIONS:


### Disk

<i>Property / unit</i>	<i>Standard</i>	
<b>Coated board:</b>		
Grammage, g/m <sup>2</sup>	400	ISO536
PE, g/m <sup>2</sup>	/	
Thickness, µm	0,525	ISO 534
<b>Baseboard:</b>		
Bending resistance L&W 15°MD, mN	26.4	ISO2493
Bending resistance L&W 15°CD, mN	12.4	ISO2493
Scott Bond, J/m <sup>2</sup>	/	

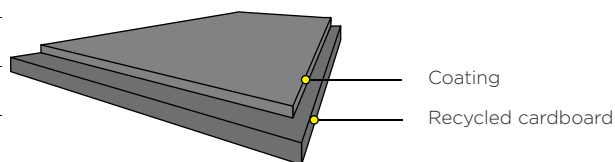

### Ring

<i>Property / unit</i>	<i>Standard</i>	
<b>Coated board:</b>		
Grammage, g/m <sup>2</sup>	470	ISO536
PE, g/m <sup>2</sup>	/	
Thickness, µm	0,68	ISO 534
<b>Baseboard:</b>		
Bending resistance L&W 15°MD, mN	31.4	ISO2493
Bending resistance L&W 15°CD, mN	14.7	ISO2493
Scott Bond, J/m <sup>2</sup>	/	



The raw materials used for the manufacture of the product are of European origin.

## CONFORMITY AND WAY OF EMPLOYMENT: /

Product used as a secondary packaging.

Is not suitable for oven and microwave cook.

To be stored in a dry place, faraway from sun rays and heat sources (0°C + 35°C).

The storage of the finished product in wet environments, could affect the final closing of the box.

**THIS PRODUCT IS NOT A TOY.**

.....